




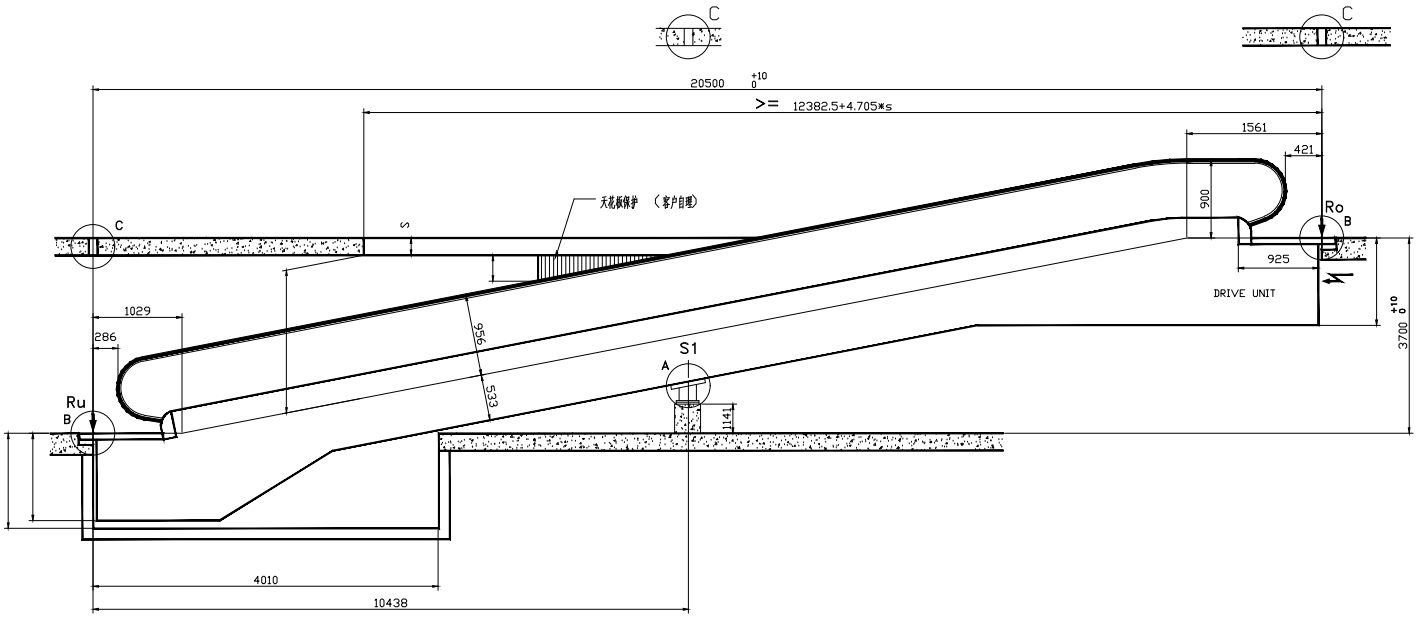


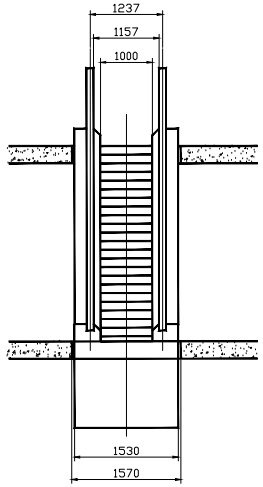


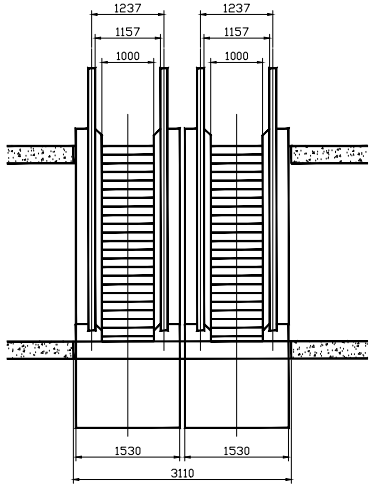


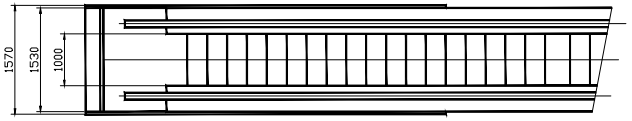




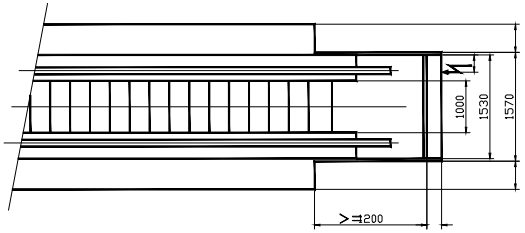


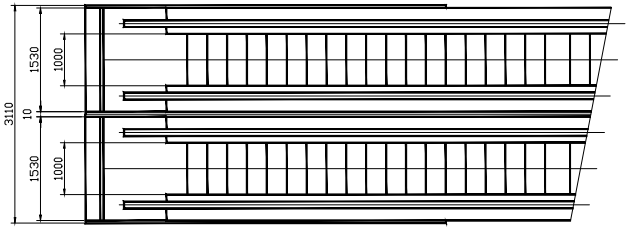




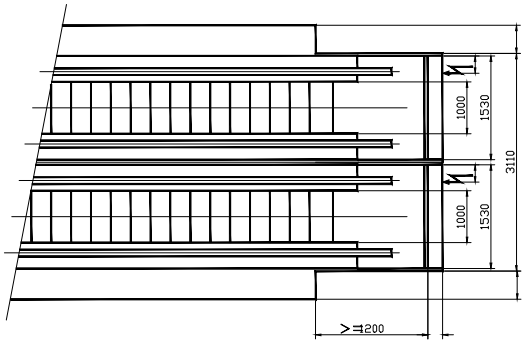


DETAIL B

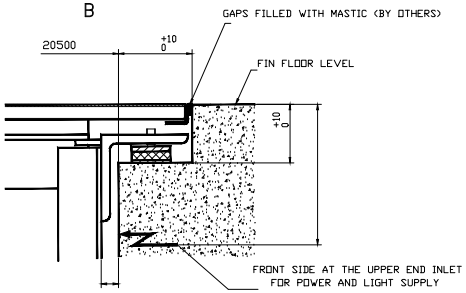

DETAIL C



DETAIL A



133 mm
:716mm

ATTENTION: THIS BLUEPRINT WAS'T DRAW IN PROPORTION.
DON'T MEASURE IN PROPORTION AND TAKE THE SIZE.

CONVEYOR BASIC SPECIFICATION

Contract No.			
Type of conveyor	KTR300-12-100-A-S-1(11)	No. of Lifts	
Rated Speed	0.5 (m/s)	No. of Passengers	6000 (man/hour)
Rise	3700 (mm)	Power	7.5 (KW)
Netweight (Single)	(KN)	Load Ro (Single)	56 (KN)
Load Ru (Single)	52 (KN)	Load S1 (Single)	120 (KN)
Load S2 (Single)	0 (KN)	Load S3 (Single)	0 (KN)

REMARKS

1. In the case of units installed parallel to each other gaps should be minimisized by pushing both units together leaving a minimum gap of 10 mm,load according to two times of singl s.
2. In the case of units installed in X-type according single,to each other gaps should be minimisized by pushing both units leaving a minimum gaps of 300 mm.
3. requirement to power:
   380V, 3-Phase 50Hz, max voltage deviation allowed ±7%.
   (3-Phase,5-Wire,with seperate circuit breakers and fuses)

Cable square	SQ (mm²)	MCCB	MCCB (A)
ELCB	ELCB (A)		

The client hereby agrees to the specification and dimensions per drawing

Approved	CFM by the Respessible	CFM by the firms

Reconfirmation is Necessary for Later Amendments bate.

Client

Constructional Arrangement 图号 Drawing No.
KTR300-12-100-A-S-1(11)

katre Lift